


One-phase Commit

Transaction T

```
write(A,1);  
write(B,2);  
...  
write(Y, 25);  
write(Z, 26);  
commit
```

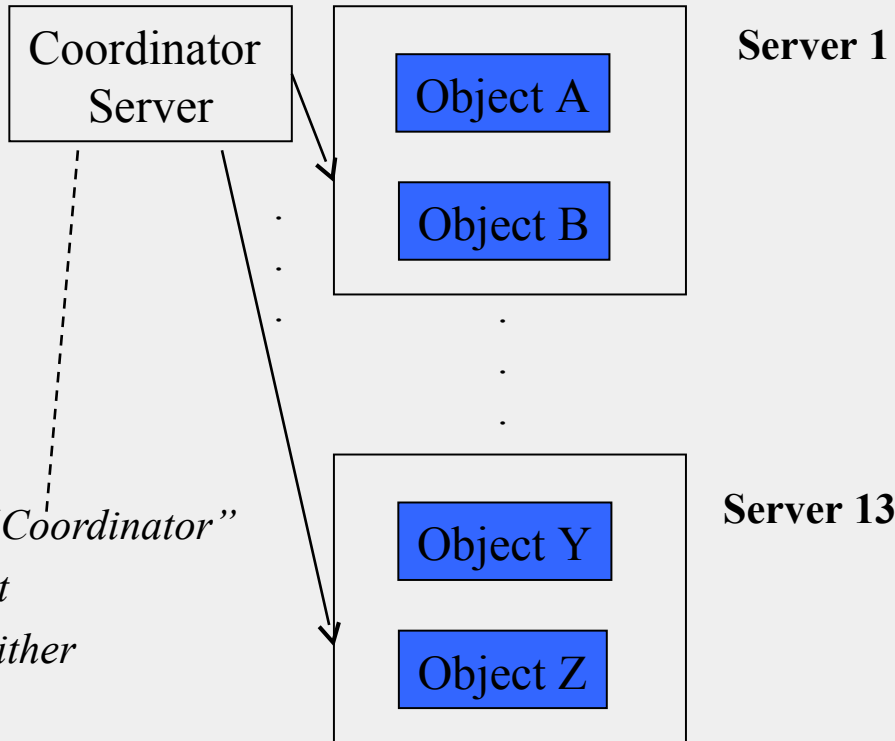

- *Special server called “Coordinator” initiates atomic commit*
- *Tells other servers to either commit or abort*