


# Search under peer failures

Say  $m=7$

One solution: maintain  $r$  multiple *successor* entries  
In case of failure, use successor entries

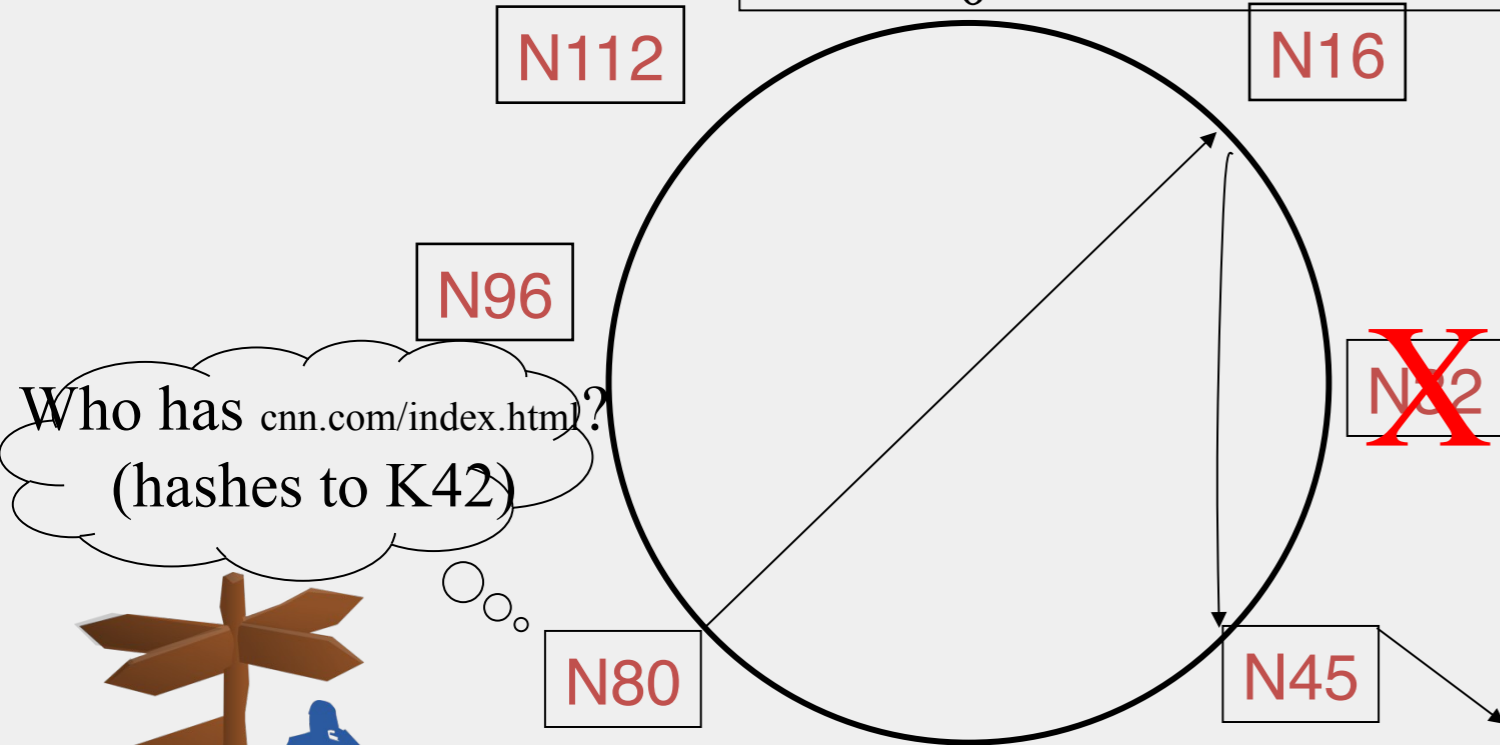

File `cnn.com/index.html` with  
key **K42** stored here