


File-Scope Variables Reside in the ...


The file-scope variable `player_list` points to the head of the list.

Where is `player_list` stored?

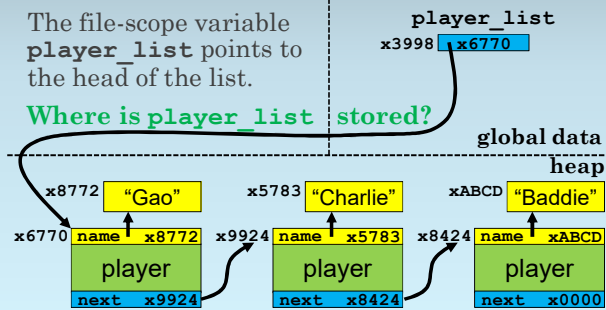


Local Variables Reside in the ...

And where is local variable `find`?

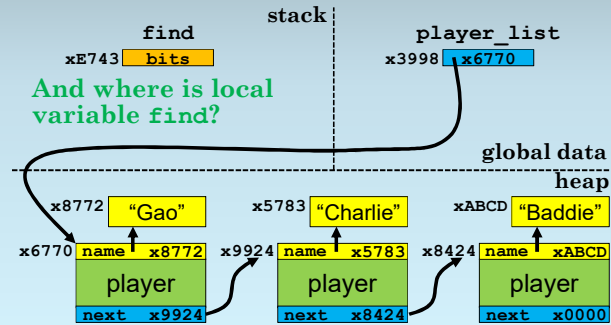

Parameter `p` is Close to Local Variable `find`

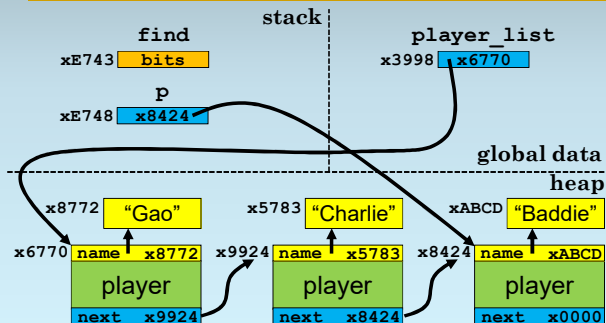

Start the Function by Initializing `find`

Here's the loop again.

```
for (find = &player_list;
    p != *find;
    find = &(*find)->next) {
    if (NULL == *find) {
        return 0;
    }
}
```

Start by initializing `find`.